BGY132; BGY133

## **VHF** amplifier modules

#### FEATURES

- Broadband VHF amplifiers
- 18 W output power
- · Operate directly from 12 V vehicle electrical systems
- Output power control over a 10 dB range by drive power.

#### **APPLICATIONS**


• Mobile communication equipment.

#### **PINNING - SOT132B**

PIN	DESCRIPTION
1	RF input
2	ground
3	V <sub>S1</sub>
4	ground
5	V <sub>S2</sub>
6	ground
7	RF output
flange	ground

#### DESCRIPTION

The BGY132 and BGY133 are two stage amplifier modules. Each module comprises two NPN silicon planar transistor chips together with lumped-element matching components.



### QUICK REFERENCE DATA


RF performance at  $T_{mb} = 25 \ ^{\circ}C$ .

TYPE NUMBER	MODE OF OPERATION	f (MHz)	V <sub>S1</sub> ; V <sub>S2</sub> (V)	PL (W)	G <sub>p</sub> (dB)	η (%)	Z <sub>S</sub> ; Z <sub>L</sub> (Ω)
BGY132	CW	68 to 88	12.5	≥18	≥22.6	typ. 45	50
BGY133	CW	80 to 108	12.5	≥18	≥22.6	typ. 45	50

#### WARNING

#### Product and environmental safety - toxic materials

This product contains beryllium oxide. The product is entirely safe provided that the BeO slab is not damaged. All persons who handle, use or dispose of this product should be aware of its nature and of the necessary safety precautions. After use, dispose of as chemical or special waste according to the regulations applying at the location of the user. It must never be thrown out with the general or domestic waste.




## BGY132; BGY133

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V <sub>S1</sub>	DC supply voltage	_	15.6	V
V <sub>S2</sub>	DC supply voltage	-	15.6	V
Vi	RF input terminal voltage	-	25	V
Vo	RF output terminal voltage	-	25	V
P <sub>D</sub>	input drive power	_	200	mW
PL	load power	_	25	W
T <sub>stg</sub>	storage temperature	-40	+100	°C
T <sub>mb</sub>	operating mounting base temperature	-20	+90	°C

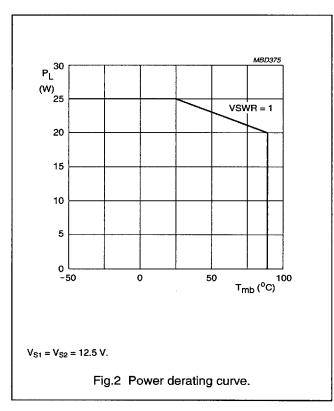



7110826 0094260 919 📟

## BGY132; BGY133


#### CHARACTERISTICS

 $T_{mb}$  = 25 °C;  $Z_S$  =  $Z_L$  = 50  $\Omega;$   $P_D$  = 100 mW;  $V_{S1}$  =  $V_{S2}$  = 12.5 V; unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
f	frequency			Î		1
	BGY132		68	_	88	MHz
	BGY133		80	-	108	MHz
I <sub>Q2</sub>	leakage current	$V_{S1} = 0; P_D = 0$	-	-	10	mA
PL	load power		18	-	-	W
G <sub>p</sub>	power gain	P <sub>L</sub> = 18 W; note 1	22.6	-	-	dB
η	efficiency	P <sub>L</sub> = 18 W; note 1	38	45	-	%
H <sub>2</sub>	second harmonic	P <sub>L</sub> = 18 W; note 1	_	-	-25	dBc
H <sub>3</sub>	third harmonic	P <sub>L</sub> = 18 W; note 1	-	-	-25	dBc
VSWRin	input VSWR	P <sub>L</sub> = 18 W; note 1	-	1.5 : 1	3:1	
	stability	VSWR $\leq$ 3 : 1; P <sub>L</sub> = 2 to 20 W; V <sub>S1</sub> = V <sub>S2</sub> = 10.8 to 15.6 V; note 1	-	-	-60	dBc
	ruggedness	$\label{eq:VSWR} \begin{split} VSWR = 50: 1; \ V_{S1} = V_{S2} = 15.6 \ V; \\ P_L < 25 \ W \ during \ 1 \ minute; \ note \ 1 \end{split}$	no degradation		tion	

#### Note

1. Adjust P<sub>D</sub> for specified P<sub>L</sub>.

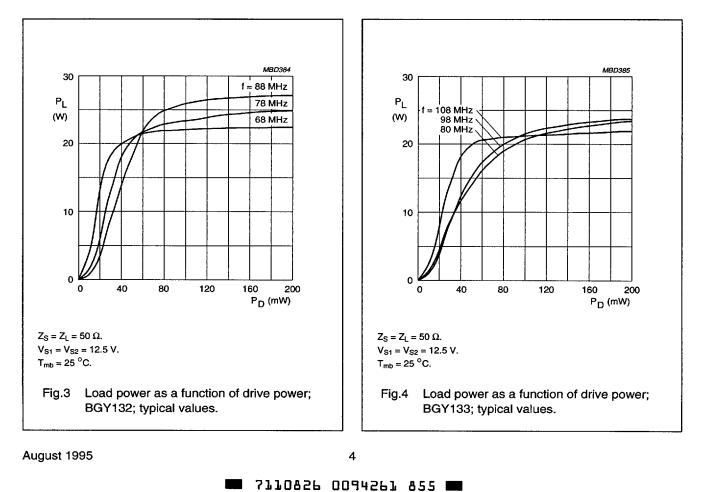


# BGY132; BGY133

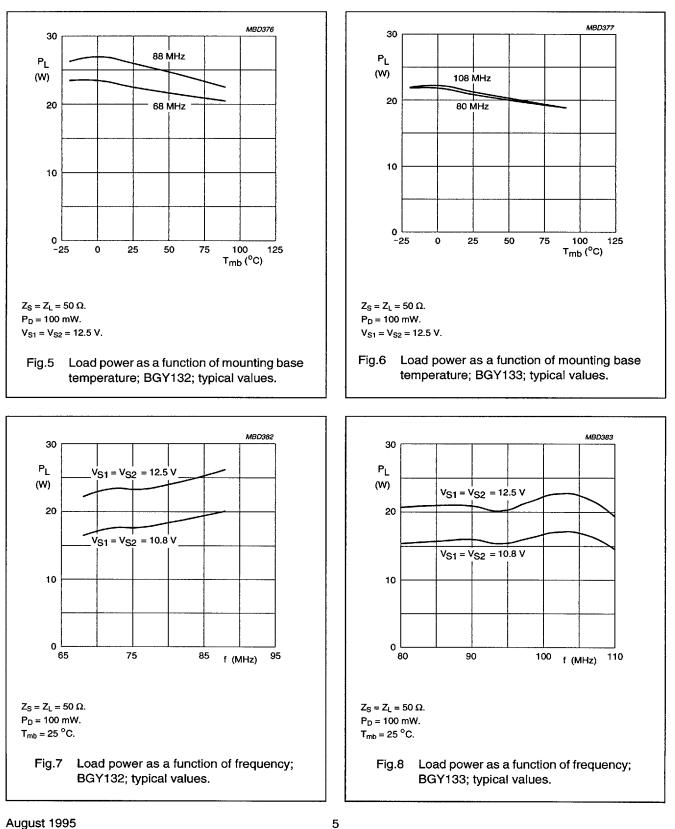


7110826 0094262 791 🔳

## BGY132; BGY133

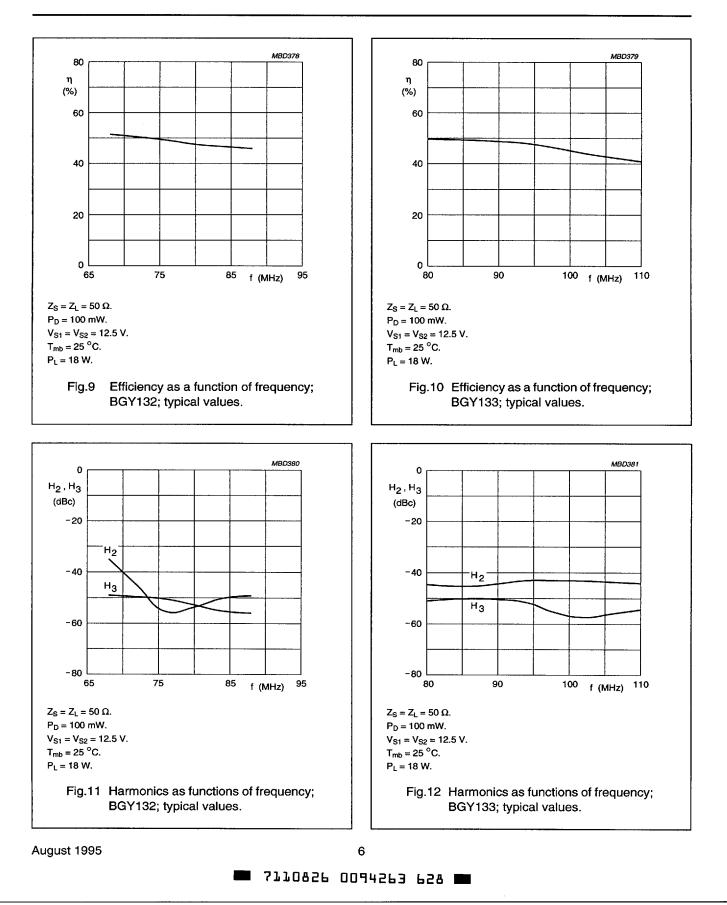

# BGY132; BGY133

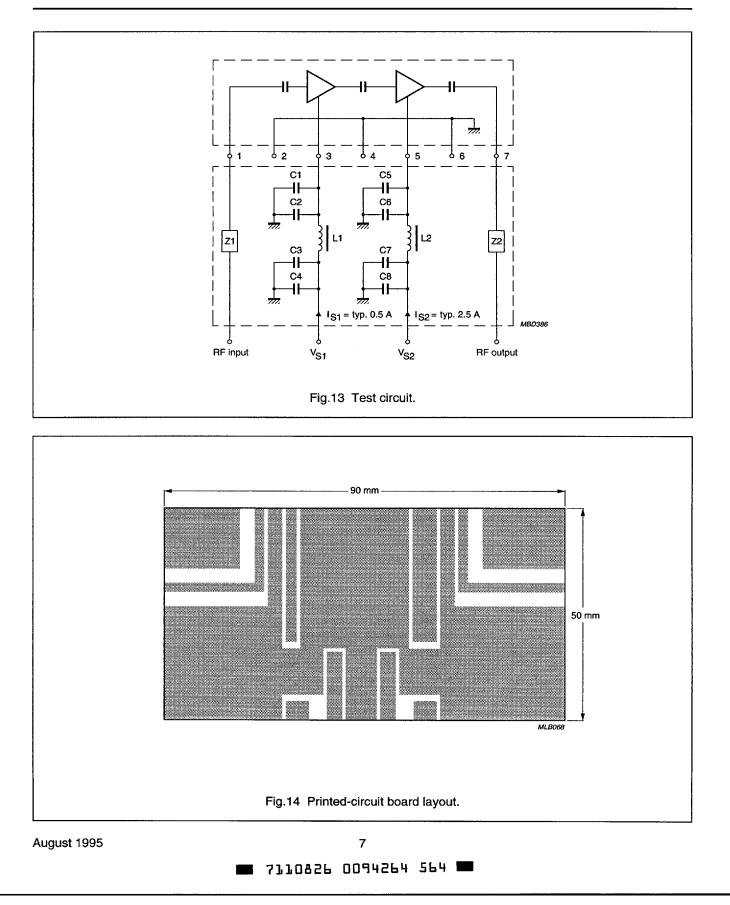

Powered by ICminer.com Electronic-Library Service CopyRight 2003

## BGY132; BGY133

List of components (see Fig.13)

COMPONENT	DESCRIPTION	VALUE	CATALOGUE NO.
C1, C5	multilayer ceramic chip capacitor	1 nF	4822 590 06614
C2, C6	tantalum capacitor	6.8 μF; 35 V	2022 001 00067
C3, C7	multilayer ceramic chip capacitor	10 nF	2222 852 47103
C4, C8	multilayer ceramic chip capacitor	100 nF	2222 852 47104
L1, L2	1 turn 0.5 mm Cu wire on ferrite coil	1 μH	3122 108 20153
Z1, Z2	stripline; note 1	50 Ω	


Note

1. The striplines are on a double copper-clad printed-circuit board with epoxy dielectric ( $\epsilon_r$  = 4.7); thickness  $\frac{1}{16}$  inch.



# BGY132; BGY133

#### PACKAGE OUTLINE

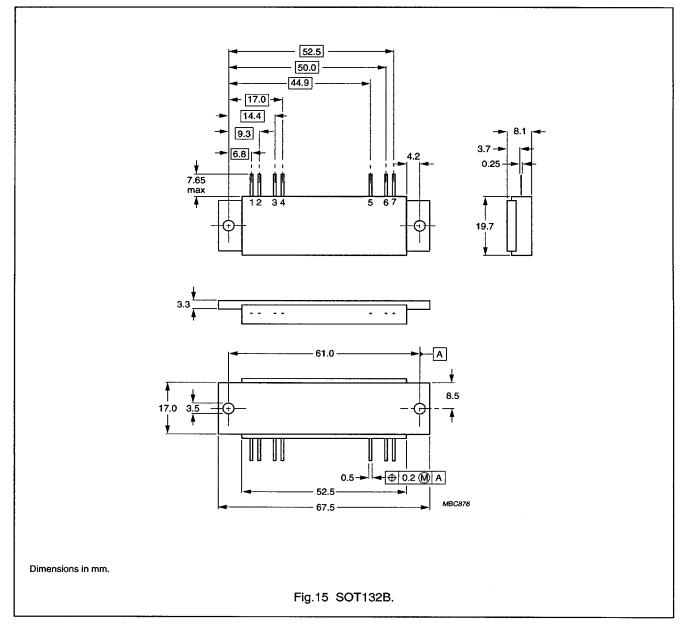



## DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
more of the limiting values of the device at these or at	accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or may cause permanent damage to the device. These are stress ratings only and operation any other conditions above those given in the Characteristics sections of the specification limiting values for extended periods may affect device reliability.
Application information	
Where application informat	ion is given, it is advisory and does not form part of the specification.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

## BGY132; BGY133

7110826 0094267 273 🖿