4M High Speed SRAM (256-kword  $\times$  16-bit)

# **HITACHI**

ADE-203-751D (Z) Rev. 1.0 Sept. 15, 1998

#### **Description**

The HM62W16255H is a 4-Mbit high speed static RAM organized 256-kword  $\times$  16-bit. It has realized high speed access time by employing CMOS process (4-transistor + 2-poly resistor memory cell)and high speed circuit designing technology. It is most appropriate for the application which requires high speed, high density memory and wide bit width configuration, such as cache and buffer memory in system. The HM62W16255H is packaged in 400-mil 44-pin SOJ and 400-mil 44-pin plastic TSOPII for high density surface mounting.

#### Features

• Single 3.3 V supply:  $3.3 \text{ V} \pm 0.3 \text{V}$ 

• Access time: 12/15 ns (max)

Completely static memory

- No clock or timing strobe required

- Equal access and cycle times
- Directly TTL compatible
  - All inputs and outputs
- Operating current: 180/160 mA (max)
- TTL standby current: 60/50 mA (max)
- CMOS standby current: 5 mA (max)


: 1mA (max) (L-version)

- Data retention current: 0.6 mA (max) (L-version)
- Data retention voltage: 2.0 V (min) (L-version)
- Center V<sub>CC</sub> and V<sub>SS</sub> type pinout

### **Ordering Information**

Type No.	Access time	Package
HM62W16255HJP-12	12 ns	400-mil 44-pin plastic SOJ (CP-44D)
HM62W16255HJP-15	15 ns	
HM62W16255HLJP-12	12 ns	
HM62W16255HLJP-15	15 ns	
HM62W16255HTT-12	12 ns	400-mil 44-pin plastic SOJ (TTP-44DE)
HM62W16255HTT-15	15 ns	
HM62W16255HLTT-12	12 ns	
HM62W16255HLTT-15	15 ns	


#### **Pin Arrangement**

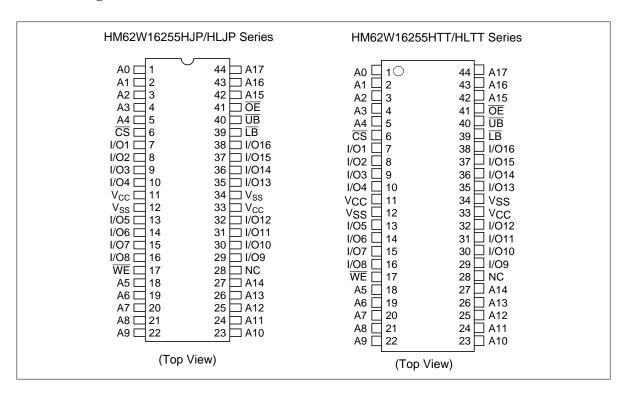

## **Pin Description**

Pin name	Function
A0 to A17	Address input
I/O1 to I/O16	Data input/output
CS	Chip select
ŌĒ	Output enable
WE	Write enable
ŪB	Upper byte select
LB	Lower byte select
V <sub>cc</sub>	Power supply
V <sub>ss</sub>	Ground
NC	No connection

### **Block Diagram**

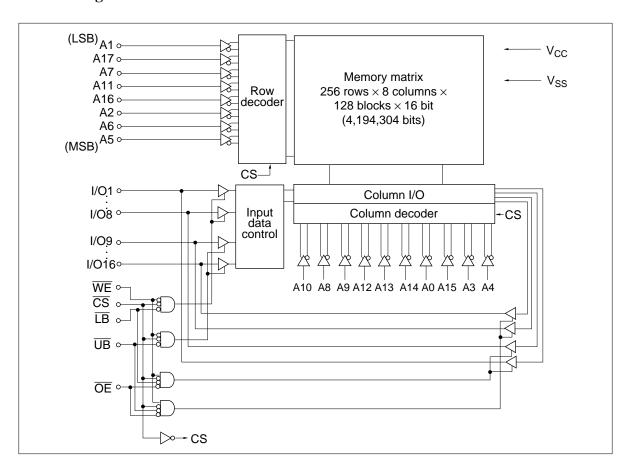

## **Operation Table**

CS	OE	WE	LB	UB	Mode	V <sub>cc</sub> current	I/O1-I/O8	I/O9-I/O16	Ref. cycle
Н	×	×	×	×	Standby	$I_{SB}, I_{SB1}$	High-Z	High-Z	_
L	Н	Н	×	×	Output disable	I <sub>cc</sub>	High-Z	High-Z	
L	L	Н	L	L	Read	I <sub>cc</sub>	Output	Output	Read cycle
L	L	Н	L	Н	Lower byte read	I <sub>cc</sub>	Output	High-Z	Read cycle
L	L	Н	Н	L	Upper byte read	I <sub>cc</sub>	High-Z	Output	Read cycle
L	L	Н	Н	Н		I <sub>cc</sub>	High-Z	High-Z	
L	×	L	L	L	Write	I <sub>cc</sub>	Input	Input	Write cycle
L	×	L	L	Н	Lower byte write	I <sub>cc</sub>	Input	High-Z	Write cycle
L	×	L	Н	L	Upper byte write	I <sub>cc</sub>	High-Z	Input	Write cycle
L	×	L	Н	Н	_	I <sub>cc</sub>	High-Z	High-Z	_

Note: x: H or L

### **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Supply voltage relative to V <sub>SS</sub>	V <sub>cc</sub>	-0.5 to +4.6	V
Voltage on any pin relative to V <sub>ss</sub>	V <sub>T</sub>	$-0.5^{*1}$ to $V_{CC} + 0.5^{*2}$	V
Power dissipation	P <sub>T</sub>	1.0	W
Operating temperature	Topr	0 to +70	°C
Storage temperature	Tstg	-55 to +125	°C
Storage temperature under bias	Tbias	-10 to +85	°C

Notes: 1.  $V_T$  (min) = -2.0 V for pulse width (under shoot)  $\leq 8$  ns

2.  $V_T$  (max) =  $V_{CC}$  + 2.0 V for pulse width (over shoot)  $\leq$  8 ns

### **Recommended DC Operating Conditions** (Ta = 0 to +70°C)

Parameter	Symbol	Min	Тур	Max	Unit	
Supply voltage	V <sub>CC</sub> *3	3.0	3.3	3.6	V	
	V <sub>SS</sub> *4	0	0	0	V	
Input voltage	V <sub>IH</sub>	2.2	_	V <sub>CC</sub> + 0.5*2	V	
	$V_{IL}$	-0.5* <sup>1</sup>		0.8	V	

Notes: 1.  $V_{IL}$  (min) = -2.0 V for pulse width (under shoot)  $\leq 8$  ns

- 2.  $V_{IH}$  (max) =  $V_{CC}$  + 2.0 V for pulse width (over shoot)  $\leq$  8 ns
- 3. The supply voltage with all  $V_{\text{cc}}$  pins must be on the same level.
- 4. The supply voltage with all  $V_{\text{SS}}$  pins must be on the same level.

### **DC Characteristics** (Ta = 0 to +70°C, $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$ , $V_{SS} = 0 \text{ V}$ )

Parameter		Symbol	Min	Typ* <sup>1</sup>	Max	Unit	Test conditions
Input leakage current		I <sub>LI</sub>	_	_	2	μΑ	$Vin = V_{SS}$ to $V_{CC}$
Output leakage current*1		I <sub>LO</sub>	_	_	2	μА	$Vin = V_{SS} \text{ to } V_{CC}$
Operating power supply current	12 ns cycle	I <sub>cc</sub>	_	_	180	mA	$\label{eq:min_cycle} \begin{split} & \underset{\begin{subarray}{c} \text{Min cycle}}{\text{CS}} = V_{\text{IL}}, & \text{lout} = 0 \text{ mA} \\ & \text{Other inputs} = V_{\text{IH}}/V_{\text{IL}} \end{split}$
	15 ns cycle	I <sub>CC</sub>	_		160		
Standby power supply current	12 ns cycle	I <sub>SB</sub>	_	_	60	mA	Min cycle, $\overline{CS} = V_{IH}$ , Other inputs = $V_{IH}/V_{IL}$
	15 ns cycle	I <sub>SB</sub>	_		50		
		I <sub>SB1</sub>		0.05	5	mA	
			*2	0.05*2	1.0*2		
Output voltage		V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 8 mA
		$V_{OH}$	2.4	_	_	V	$I_{OH} = -4 \text{ mA}$

Note: 1. Typical values are at  $V_{cc} = 3.3 \text{ V}$ ,  $Ta = +25^{\circ}\text{C}$  and not guaranteed.

2. This characteristics is guaranteed only for L-version.

**Capacitance** (Ta = +25°C, f = 1.0 MHz)

Parameter	Symbol	Min	Тур	Max	Unit	Test conditions
Input capacitance*1	Cin	_	_	6	pF	Vin = 0 V
Input/output capacitance*1	C <sub>I/O</sub>	_	_	8	pF	V <sub>I/O</sub> = 0 V


Note: 1. This parameter is sampled and not 100% tested.

AC Characteristics (Ta = 0 to +70°C,  $V_{CC}$  = 3.3 V  $\pm$  0.3 V, unless otherwise noted.)

#### **Test Conditions**

Input pulse levels: 3.0 V/0.0 VInput rise and fall time: 3 ns

Input and output timing reference levels: 1.5 V
Output load: See figures (Including scope and jig)

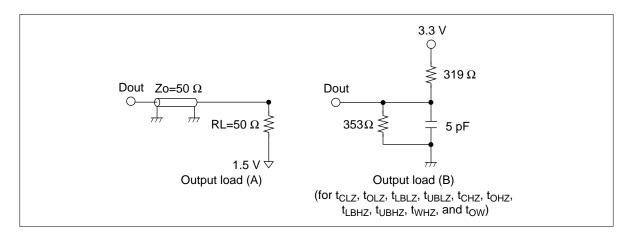

#### **Read Cycle**

		HM62W16255H					
		-12		-15			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Read cycle time	t <sub>RC</sub>	12	_	15	_	ns	
Address access time	t <sub>AA</sub>	_	12	_	15	ns	
Chip select access time	t <sub>ACS</sub>	<u> </u>	12	_	15	ns	
Output enable to output valid	t <sub>OE</sub>		6	_	7	ns	
Byte select to output valid	$t_{LB}, t_{UB}$	_	6	_	7	ns	
Output hold from address change	t <sub>oh</sub>	3	_	3		ns	
Chip select to output in low-Z	t <sub>CLZ</sub>	3	_	3		ns	1
Output enable to output in low-Z	t <sub>oLZ</sub>	0	_	0	_	ns	1
Byte select to output in low-Z	$t_{LBLZ}, t_{UBLZ}$	0	_	0	_	ns	1
Chip deselect to output in high-Z	t <sub>CHZ</sub>		6	_	7	ns	1
Output disable to output in high-Z	t <sub>OHZ</sub>		6	_	7	ns	1
Byte deselect to output in high-Z	$t_{LBHZ}, t_{UBHZ}$		6	_	7	ns	1

#### Write Cycle


#### HM62W16255H

		-12		-15		_	
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Write cycle time	t <sub>wc</sub>	12	_	15	_	ns	
Address valid to end of write	t <sub>AW</sub>	8		10	_	ns	
Chip select to end of write	t <sub>cw</sub>	8	_	10	_	ns	8
Write pulse width	t <sub>wP</sub>	8	_	10		ns	7
Byte select to end of write	$t_{LBW}, t_{UBW}$	8	<del>-</del>	10	<del>_</del>	ns	9, 10
Address setup time	t <sub>AS</sub>	0	_	0	_	ns	5
Write recovery time	t <sub>wR</sub>	0	_	0		ns	6
Data to write time overlap	t <sub>DW</sub>	6	<u>—</u>	7	<u> </u>	ns	
Data hold from write time	t <sub>DH</sub>	0	_	0	_	ns	
Write disable to output in low-Z	t <sub>ow</sub>	3	_	3		ns	1
Output disable to output in high-Z	t <sub>OHZ</sub>	_	6	_	7	ns	1
Write enable to output in high-Z	t <sub>whz</sub>	_	6	_	7	ns	1


- Notes: 1. Transition is measured  $\pm 200$  mV from steady voltage with Load (B). This parameter is sampled and not 100% tested.
  - 2. If the  $\overline{\text{CS}}$  or  $\overline{\text{LB}}$  or  $\overline{\text{UB}}$  low transition occurs simultaneously with the  $\overline{\text{WE}}$  low transition or after the  $\overline{\text{WE}}$  transition, output remains a high impedance state.
  - 3. WE and/or CS must be high during address transition time.
  - 4. If  $\overline{CS}$ ,  $\overline{OE}$ ,  $\overline{LB}$  and  $\overline{UB}$  are low during this period, I/O pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.
  - 5.  $t_{AS}$  is measured from the latest address transition to the latest of  $\overline{CS}$ ,  $\overline{WE}$ ,  $\overline{LB}$  or  $\overline{UB}$  going low.
  - 6.  $t_{WR}$  is measured from the earliest of  $\overline{CS}$ ,  $\overline{WE}$ ,  $\overline{LB}$  or  $\overline{UB}$  going high to the first address transition.
  - 7. A write occurs during the overlap of low  $\overline{CS}$ , low  $\overline{WE}$  and low  $\overline{LB}$  or low  $\overline{UB}$ .
  - 8.  $t_{cw}$  is measured from the later of  $\overline{CS}$  going low to the end of write.
  - 9.  $t_{LBW}$  is measured from the later of  $\overline{LB}$  going low to the end of write.
  - $10.t_{\tiny \text{UBW}}$  is measured from the later of  $\overline{\text{UB}}$  going low to the end of write.

## **Timing Waveforms**


Read Timing Waveform (1)  $(\overline{WE} = V_{IH})$ 

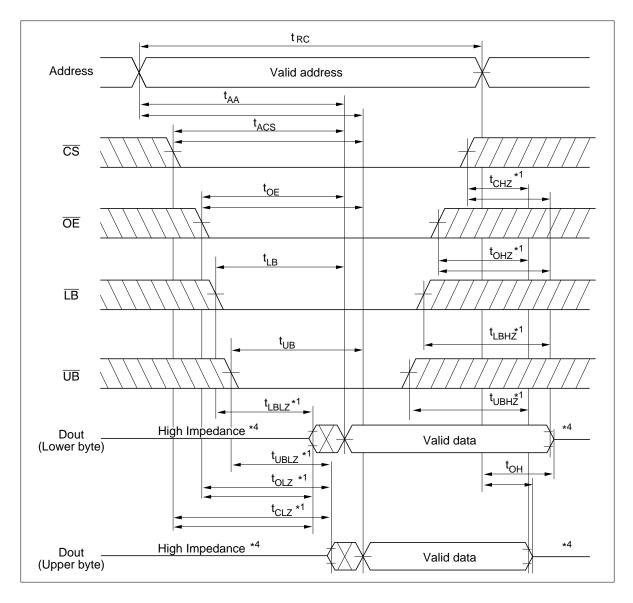


Read Timing Waveform (2)  $(\overline{WE}=V_{IH},\overline{LB}=V_{IL},\overline{UB},=V_{IL})$ 

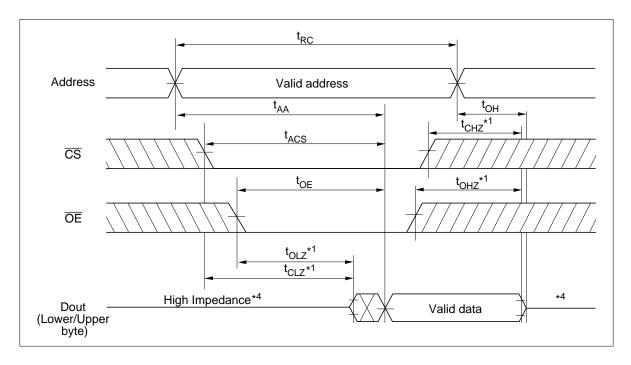


### Write Timing Waveform (1) ( $\overline{LB}$ , $\overline{UB}$ Controlled)

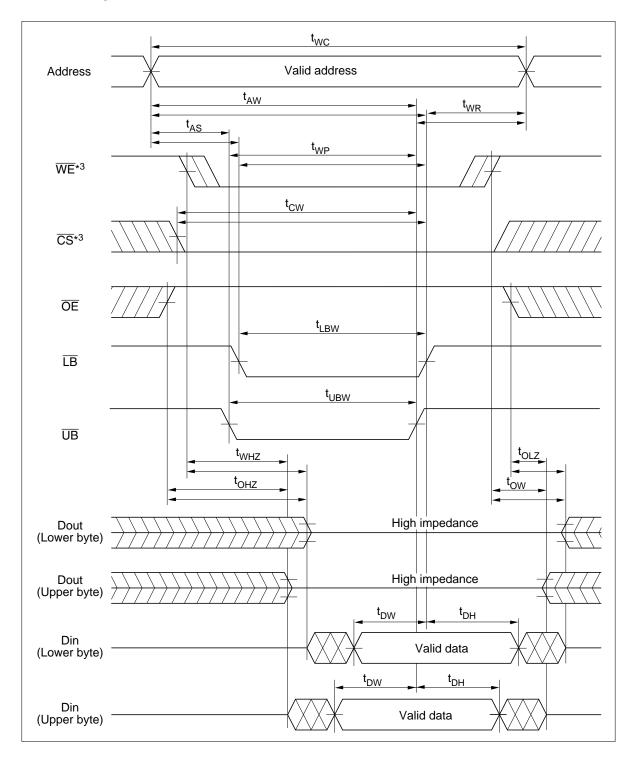

### Write Timing Waveform (2) (WE Controlled)

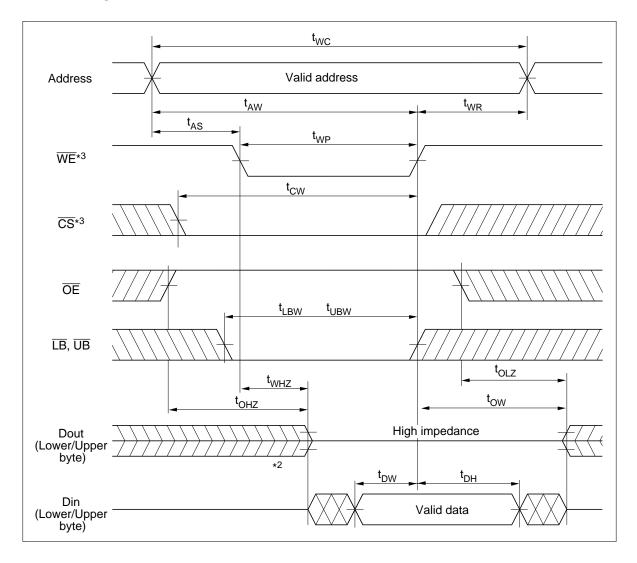

### Write Timing Waveform (3) $(\overline{\text{CS}} \text{ Controlled})$

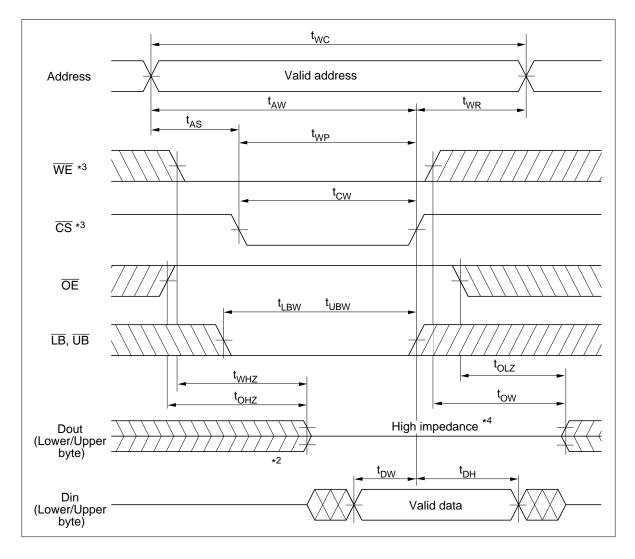


## Low $V_{CC}$ Data Retention Characteristics (Ta = 0 to +70°C)

This characteristics is guaranteed only for L-version.

Parameter	Symbol	Min	Typ*1	Max	Unit	Test conditions
V <sub>cc</sub> for data retention	$V_{DR}$	2.0	_	_	V	$V_{CC} \ge \overline{CS} \ge V_{CC} - 0.2 \text{ V},$ (1) 0 V \le Vin \le 0.2 V or (2) $V_{CC} \ge Vin \ge V_{CC} - 0.2 \text{ V}$
Data retention current	I <sub>CCDR</sub>	_	40	600	μΑ	$V_{cc} = 3 V V_{cc} \ge \overline{CS} \ge V_{cc} - 0.2 V, (1) 0 V \le Vin \le 0.2 V or (2) V_{cc} \ge Vin \ge V_{cc} - 0.2 V$
Chip deselect to data retention time	t <sub>CDR</sub>	0	<u> </u>	_	ns	See retention waveform
Operation recovery time	t <sub>R</sub>	5	_	_	ms	


Note: 1. Typical values are at  $V_{cc} = 3.0 \text{ V}$ ,  $Ta = +25^{\circ}\text{C}$ , and not guaranteed.

### Low $\boldsymbol{V}_{CC}$ Data Retention Timing Waveform

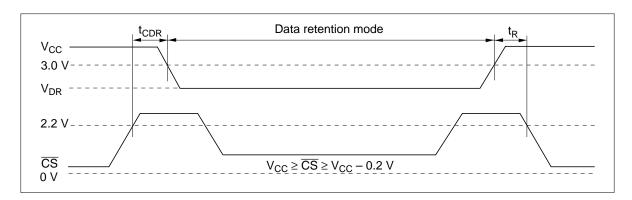


### **Package Dimensions**

#### HM62W16255HJP/HLJP Series (CP-44D)

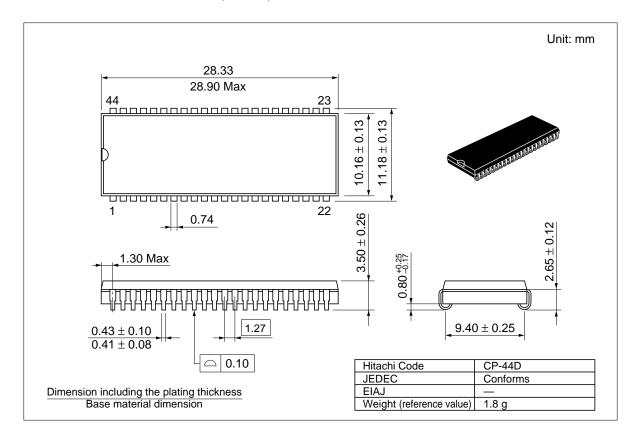

#### HM62W16255HTT/HLTT Series (TTP-44DE)

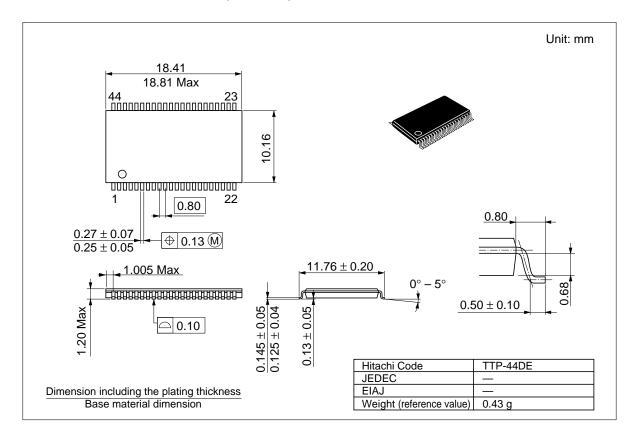

#### **Cautions**

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as failsafes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

## IITACHI

Semiconductor & IC Div.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

**URL** NorthAmerica http:semiconductor.hitachi.com/ Europe http://www.hitachi-eu.com/hel/ecg

http://www.has.hitachi.com.sg/grp3/sicd/index.htm http://www.hitachi.com.tw/E/Product/SICD\_Frame.htm Asia (Singapore) Asia (Taiwan) Asia (HongKong) http://www.hitachi.com.hk/eng/bo/grp3/index.htm

Japan http://www.hitachi.co.ip/Sicd/indx.htm

#### For further information write to:

Hitachi Semiconductor (America) Inc. 2000 Sierra Point Parkway Brisbane, CA 94005-1897 Tel: <1> (800) 285-1601 Fax: <1> (303) 297-0447

Hitachi Europe GmbH Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany

Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd.

Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead

Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533

Hitachi Asia Ltd. Taipei Branch Office 3F. Hung Kuo Building, No.167 Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong

Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX

Copyright © Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.

### **Revision Record**

Rev.	Date	Contents of Modification	Drawn by	Approved by
0.0	Feb. 28, 1997	Initial issue	Y. Saitoh	A. Ide
0.1	Nov. 20, 1997	Change of subtitle	K. Makuta	K. Makuta
0.2	Dec. 5, 1997	Features    Addition of Operating current    Addition of TTL standby current    Addition of CMOS standby current    Addition of Data retention current    Addition of Data retention voltage    Change of Block Diagram    Absolute Maximum Ratings $P_T$ : 1.0/1.5 W to 1.0 W    Change of notes    Recommended DC Operating Conditions $V_{IH}$ (max): $V_{CC}$ + 0.3 V to $V_{CC}$ + 0.5 V $V_{IL}$ (min): -0.3 V to -0.5 V    Change of notes    DC Characteristics $I_{CC}$ (max): 300/270/250 mA to 210/180/150 mA $I_{SB}$ (max): 100/100/100 mA to 60/50/40 mA $I_{SB}$ (max): 10/0.5 mA to 5/1 mA    Test conditions $I_{CC}$ and $I_{SE}$ : Addition of Min cycle    Test conditions $I_{CC}$ and $I_{SE}$ : Addition of f = 0 MHz    AC Characteristics    Change of Output load (A) $I_{CE}$ , $I_{LB}$ , $I_{UB}$ , $I_{CHZ}$ , $I_{CHZ}$ , $I_{LBHZ}$ and $I_{UBHZ}$ (max):	T. Fukazawa	K. Makuta
0.3	May. 15, 1998	Features Change of Operating current Change of TTL standby current Change of Block Diagram DC Characteristics I <sub>CC</sub> (max): 210/180/150 ns to 200/180/160 ns I <sub>SB</sub> (max): 60/50/40 ns to 70/60/50 ns Addition of Package Dimensions (TTP-44DE)	T. Fukazawa	K. Makuta

Rev.	Date	Contents of Modification	Drawn by	Approved by
1.0	Sep. 15, 1998	Delete of HM62W16255H-10 Series Features Change of Data retention current DC Characteristics I <sub>SB1</sub> (typ): —/— mA to 0.05/0.05 mA Low V <sub>CC</sub> Data Retention Characteristics I <sub>CCDR</sub> : —/—/300 μA to —/40/600 μA		